

Seachrome Corporation
1906 East Dominguez Street
Long Beach, California 90810
Phone: (800) 955-2476
Fax: (800) 444-3380

STE1-320135-Naugahyde
32" x 13-1/2" Tub Seat
End Mount with Frame

02-12-2024

Technical drawing of a rectangular cushion with dimensions and labels:

- Top View (Left):**
 - Overall width: 14
 - Distance between top mounting tabs: 10
 - Width of each top mounting tab: 2
 - Overall height: 32
 - Distance between bottom mounting tabs: 13 1/2
 - Radius of bottom corners: R2 (typ)
 - Label: 29" Slats
- Side View (Right):**
 - Top mounting tab width: 3 1/2
 - Radius of top corner: R1/2
 - Distance from top edge to center of mounting hole: 2 1/2
 - Mounting hole diameter: Ø1.00
 - Distance from mounting hole to bottom edge: 1 1/2
 - Overall height: 28 1/4
 - Label: 2" Thick Naugahyde Cushion

All Shower Seats must only be installed using suitable fasteners and sufficient in-wall backing materials. ADA mounting height for lowered seat is 17" (432mm) to 19" (482mm).

This drawing and the information contained herein is the property of Seachrome Corporation and shall not be reproduced, copied, or disclosed in whole or in part, or used in manufacturing, or for any other purpose without the written permission of Seachrome Corporation.

SEACHROME

Seachrome Corporation
1906 East Dominguez Street
Long Beach, California 90810
Phone: (800) 955-2476
Fax: (800) 444-3380

Description:


STE1-320135-Phenolic Slats 32" x 13-1/2" Tub Seat End Mount with Frame

Customer:

Customer Part #

02-12-2024

SHOWER SEAT MODEL #STE1-320135 (End Mount Seat with Frame) (Phenolic Slats)

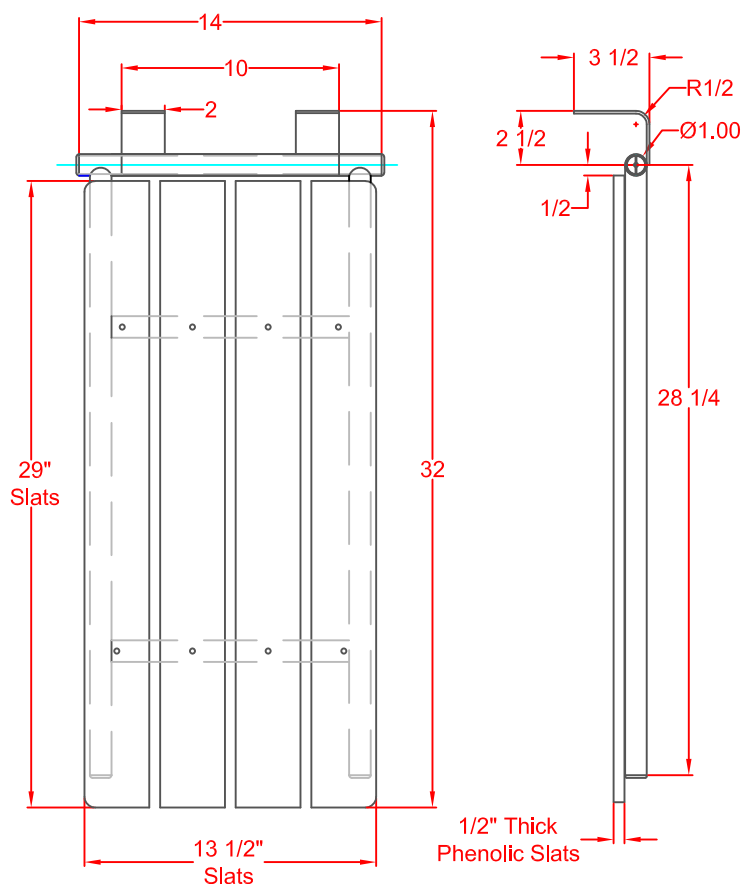

OPERATION:

Seat is automatically held in a raised position by a stainless Hinge Bracket attached to the rear of the Tub Seat. When the seat is lowered into its down position the Seat must rest securely on the tub dam for support.

ARCHITECTURAL SPECIFICATIONS:

Model #STE1-320135 Wall Hung Shower Seat from Seachrome Corp., Long Beach, California 90810. Phone: (800) 955-2476. Frame: Type 304 (18-8) S.S. tube, 1" (25mm) x 18ga. (1.2mm) sq. main frame with 1" (25mm) x 18ga. (1.2mm) sq. cross members.

MATERIALS:

FRAME: Type 304 (18-8) S.S. tubing, 1" (25mm) x 18ga. (1.2mm) sq. main frame with 1" (25mm) x 18ga. (1.2mm) sq. cross-members.

WALL BRACKETS (2): Type 304 (18-8) S.S., 10ga. (3.4mm) x 2" (51mm) wide x 3.5" (88.9mm) long, heliarc welded to 1" (25mm) rd. x 18ga (1.2mm) Constant Friction Hinge. Three Mounting holes in each bracket.

SEAT CHOICES:(Designate when ordering)

PA - ALMOND
PAA - AGED ASH
PB - BLACK
PG - GREY
PLG - LIGHT GREY
PRT - RUSTIC TEAK
PT - TEAK
PWA - WEATHERED ASH
PW - WHITE

INSTALLATION:

Lay seat flat resting on both sides of tub. Set the hinge flat against the tub wall and mark holes. (Make sure bottom of hinge rests on tub surface for support).

All Shower Seats must only be installed using suitable fasteners and sufficient in-wall backing materials. ADA mounting height for lowered seat is 17" (432mm) to 19" (482mm).

Proprietary & Confidential

This drawing and the information contained herein is the property of Seachrome Corporation and shall not be reproduced, copied, or disclosed in whole or in part, or used in manufacturing, or for any other purpose without the written permission of Seachrome Corporation.